neway®

Broadcast monitor for 4K/Full HD camcorder & DSLR
Application for taking photos & making movies

CK1016S MODEL NO.:

0
-6
-12
-18
-24
-30
-36
-42
-48
-54
-60
neway

10.1"

FHD PRO SDI
Broadcast Monitor

3G-SDI 4K HDMI

FHD 1920×1200

550g LIGHTWEIGHT

A Better Camera Assist

CK1016S, matches with world-famous 4K / FHD camera brands, to assist cameraman in better photography experience for variety of applications, i.e. filming on site, broadcast live action, making movies and post-production, etc.

FHD Resolution

Creatively integrated the 1920×1200 native resolution into a 10.1 inch 8 bit LCD panel, which is far beyond from retina identification. Features with 1000:1, 320 cd/m^2 brightness & 175° WVA; With full lamination technology, see every detail in massive FHD visual quality.

4K HDMI / 3G-SDI Signal

HDMI 1.4b supports 4K 30Hz signal input,
3G-SDI supports 3G-SDI, HD-SDI and SD-SDI signal inputs.
Universal VGA port can also meet different usage environment.

G+G Technology

Adopt the unique Glass+Glass technology to smooth the appearance of its body and hold the widest view in order to achieve the best effect under the auxiliary function among the camera kits,

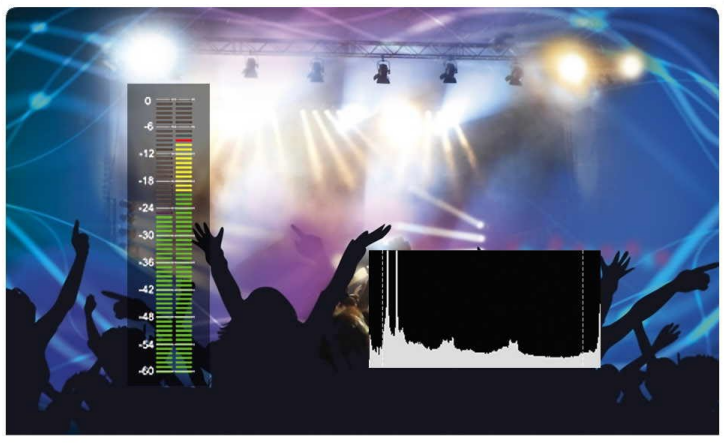

LEVEL METER / HISTOGRAM

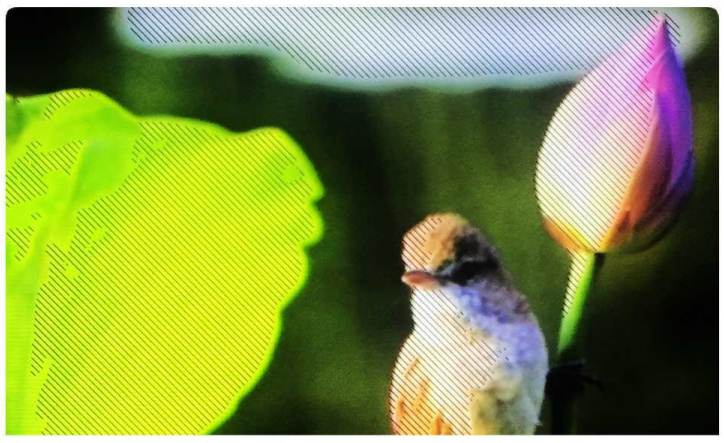

EXPOSURE

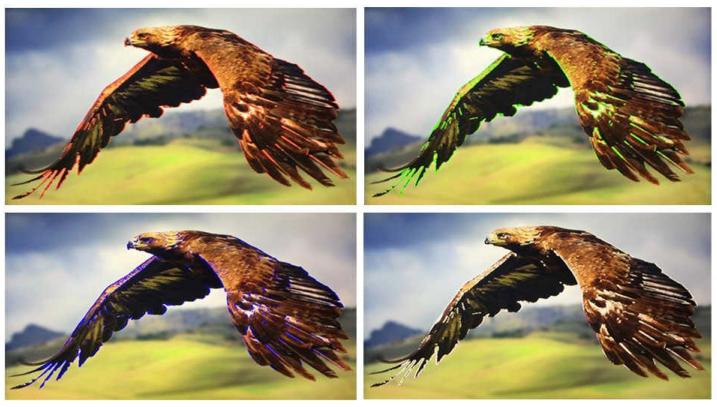

PEAKING FILTER

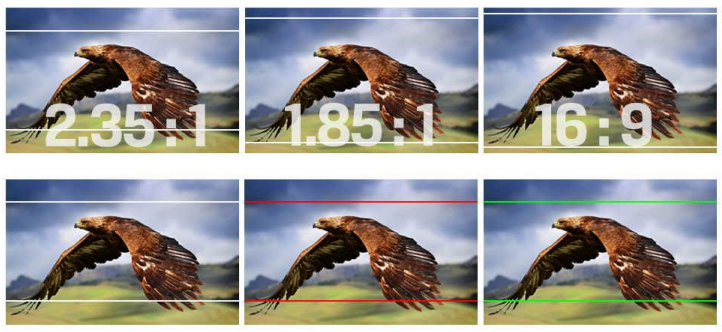

ASPECT MARKER

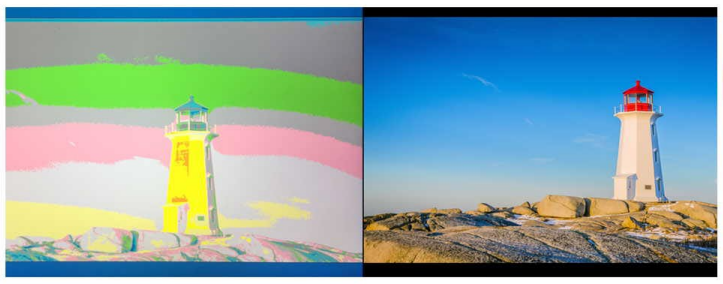

FALSE COLOR FILTER

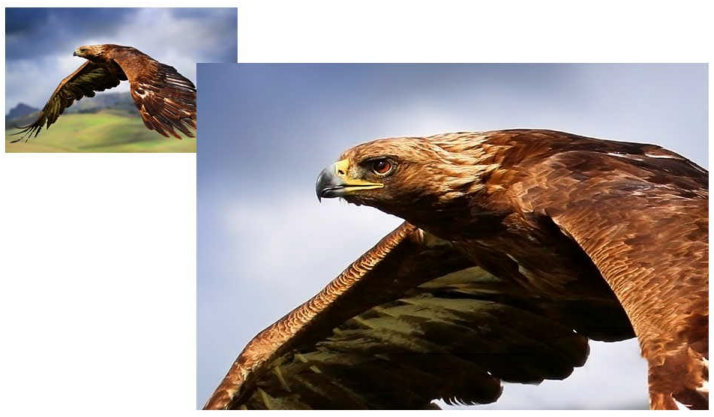

ZOOM

Camera Auxiliary Functions

CK1016S provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.

- Level meter
- Histogram
- Peaking
- False color
- Check field
- Image flip
- Overscan
- Underscan
- Image freeze
- Aspect ratio
- Grid
- Center marker
- Screen marker
- Color temperature
- Exposure

Battery

F-series Plate Bracket

VESA 75mm mount design allows CK1016S to power up with a external SONY F-series battery on its back. F970 can work continuously for more than 4 hours. Optional V-lock mount and Anton Bauer mount are also compatible with.

Multi

Angle Mounting Type

Support multi-angled 1/4 inch screw holes, VESA 75mm and gimbal brackets so that photographer can find the most proper mounting method regardless of shooting angle.



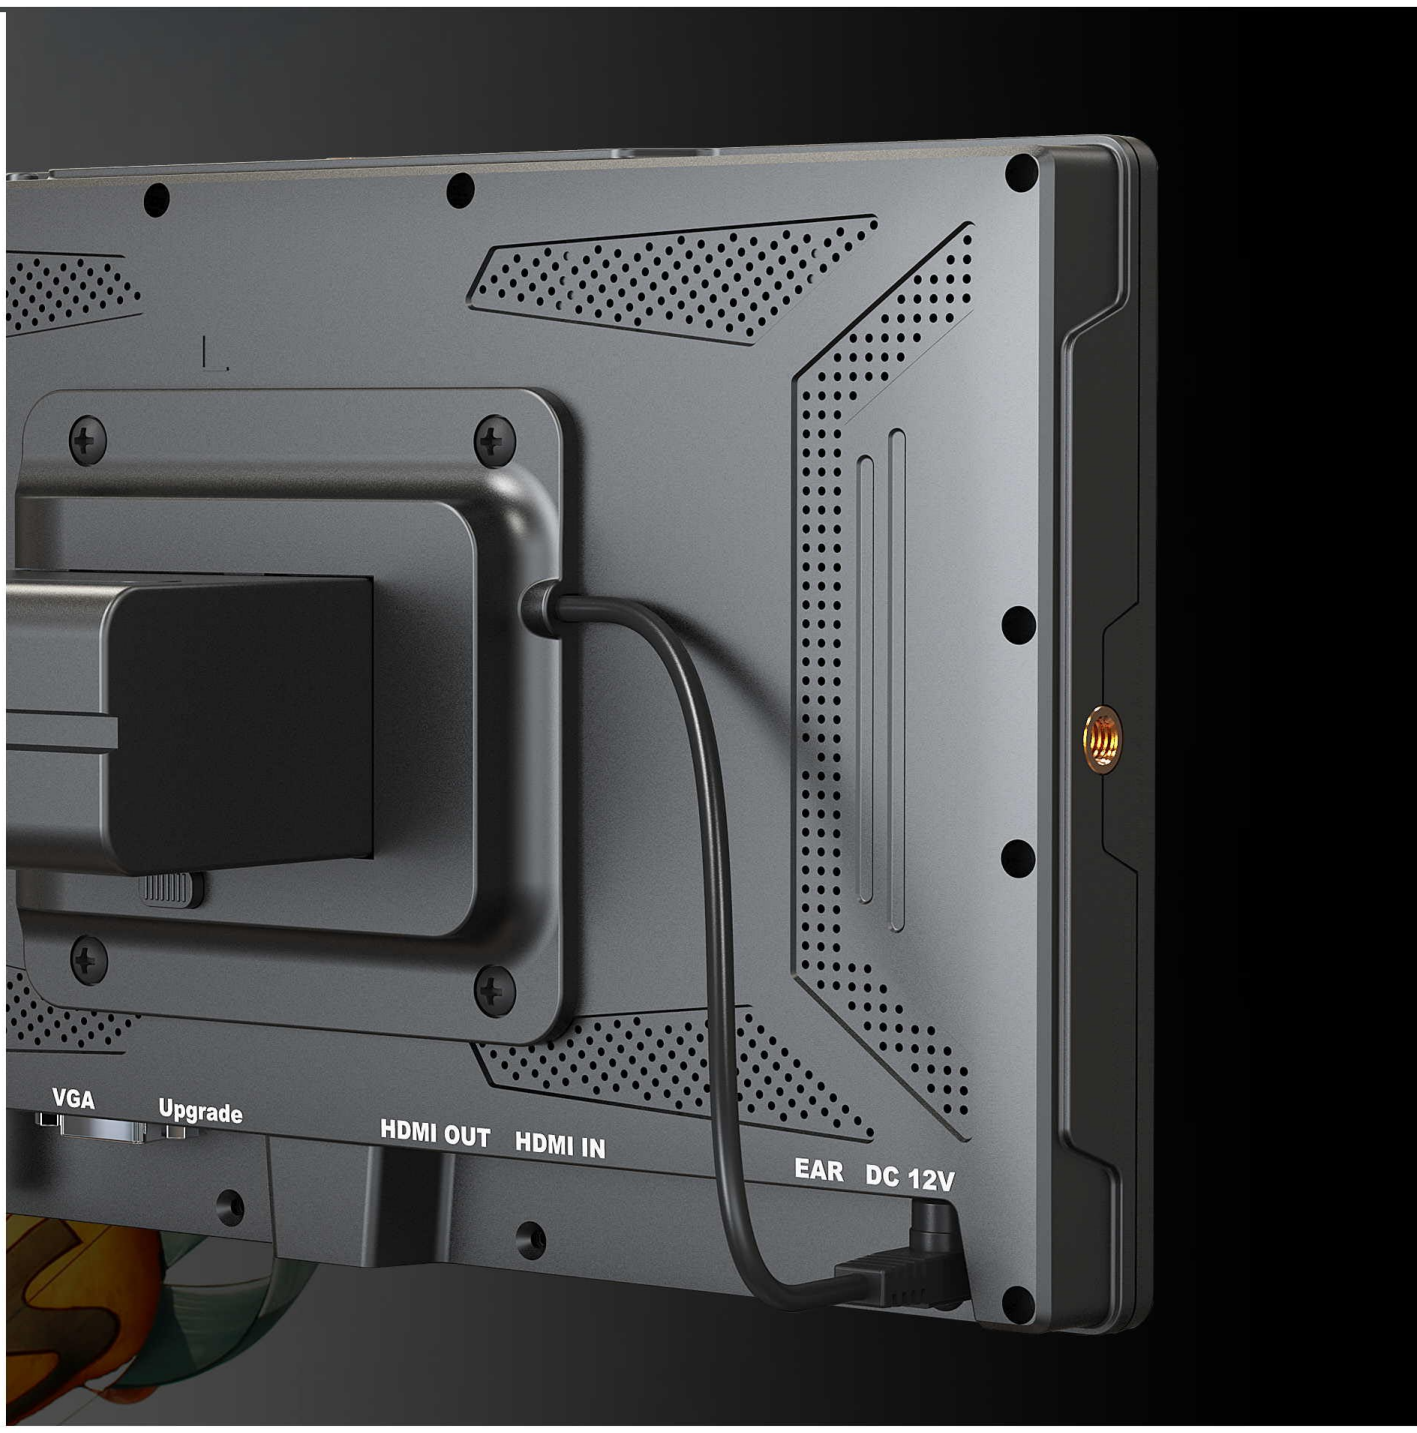

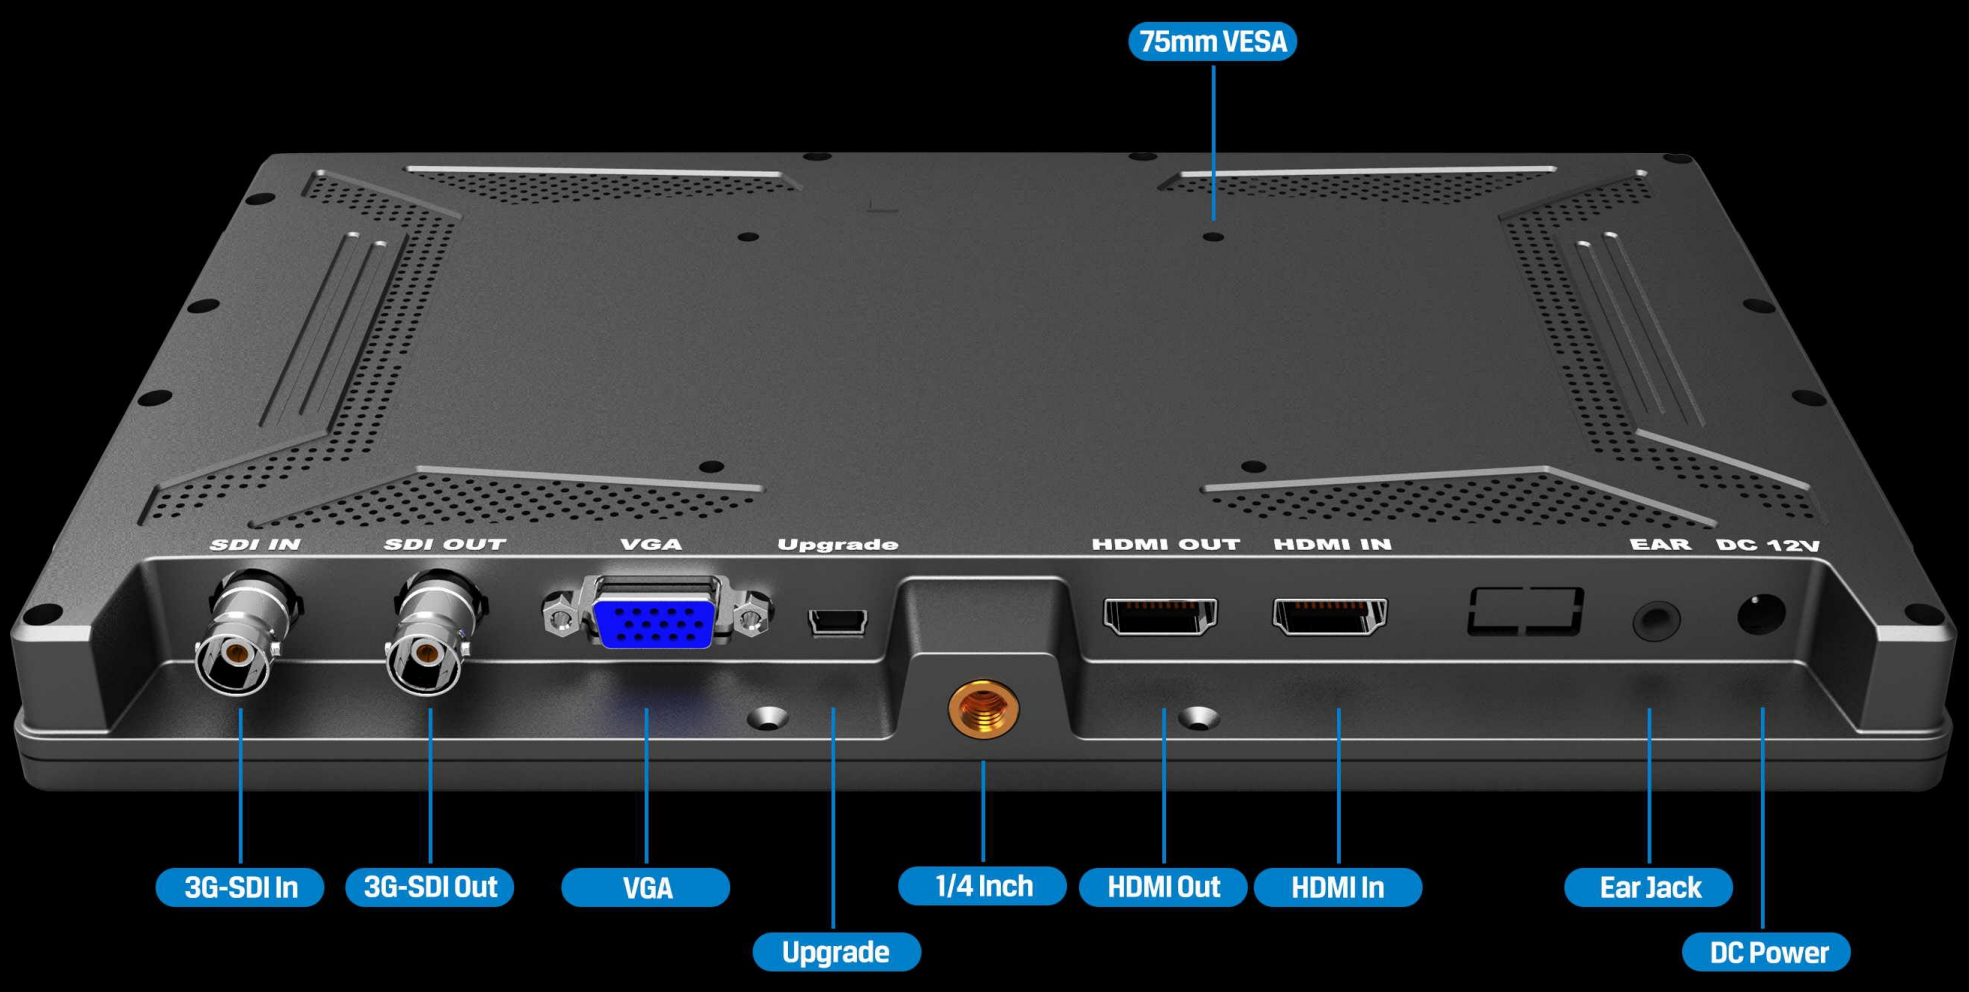

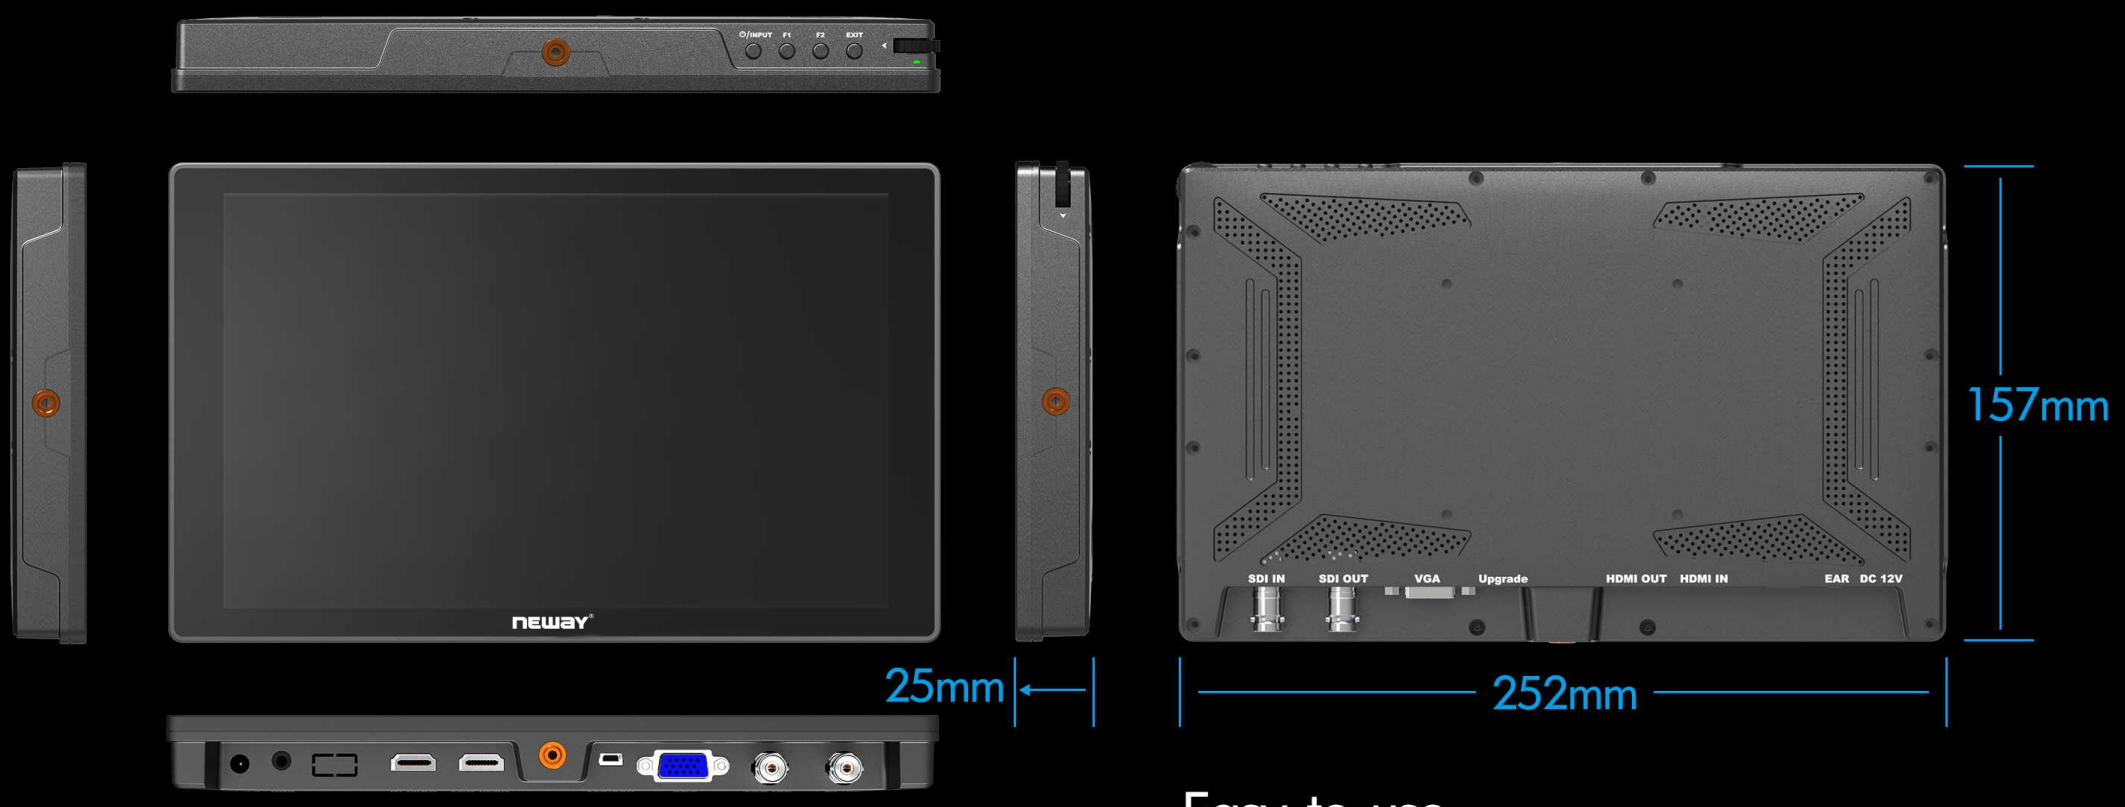

Easy-to-use

F1&F2 user-definable buttons to custom auxiliary functions as shortcut, such as peaking, underscan and checkfield. Use the Dial to select and adjust the value among of sharpness, saturation, tint and volume, etc.

⏻ / **INPUT** button. Single press to power on, or switch signals; Long press to power off.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	10.1" 8bit IPS
	Physical Resolution	1920×1200
	Aspect Ratio	16:10
	Brightness	320cd/m^2
	Contrast	1000:1
	Viewing Angle	175°/175°(H/V)
INPUT	3G-SDI	1
	HDMI	HDMI 1.4b×1 (support 4K 30Hz)
	VGA	1
	Mini USB	1 (upgrade port)
OUTPUT	3G-SDI loop	1
	HDMI	HDMI 1.4b×1 (support 4K 30Hz)
AUDIO	Speaker	1
	Ear Jack	1
POWER	Current	1A(12V)
	Input Voltage	DC 7-24V
	Battery Plate	SONY F-series (F550/F750/F970. . .)
		V-mount / Anton Bauer mount(Optional)
	Power Consumption	≤13W
ENVIRONMENT	Operating Temperature	0℃~50℃
	Storage Temperature	-20℃~60℃
DIMENSION	Dimension(LWD)	252mm × 157mm × 25mm
	Weight	550g

Note: Due to constant effort to improve products and product features, specifications may change without notice.

12V DC Adapter

HDMI A-C Cable

VESA F970 Battery Plate

Hot Shoe Mount

SunShade

Mout Plate Bracket

Gimbal bracket (optional)


V-mount / Anton Bauer mount (Optional)

Quanzhou Neway Industrial Limited

No. C-3 Xunmei Industrial Area
Fengze, Quanzhou Fujian 362000 China
Email: sales@newayil.com
Tel: +86-595-22519926 / 22519927

www.newaye.com | Industry Touch Screen Monitor
www.newayhd.com | HDMI/SDI Camera, FPV Field Monitor
www.embedded.cc | Embedded Display & PC Terminal